


○KAMU1010-N1能力表

○操作温度20°C基本性能データ(窒素生成量)


ver. 20100101

処理圧力 MPaG	窒素ガス生成量(NM3/hr)						圧縮空気供給量(NM3/hr)					
	窒素ガス純度(%)						窒素ガス純度(%)					
99.5	99.0	98.0	97.0	96.0	95.0	99.5	99.0	98.0	97.0	96.0	95.0	
0.30	0.005	0.007	0.011	0.014	0.017	0.021	0.035	0.038	0.042	0.045	0.049	0.053
0.35	0.007	0.010	0.014	0.018	0.022	0.027	0.042	0.045	0.050	0.055	0.060	0.065
0.40	0.009	0.012	0.017	0.022	0.028	0.033	0.049	0.053	0.059	0.065	0.071	0.077
0.45	0.011	0.015	0.021	0.027	0.033	0.040	0.056	0.061	0.068	0.075	0.082	0.090
0.50	0.013	0.017	0.025	0.032	0.039	0.047	0.064	0.069	0.078	0.086	0.094	0.103
0.55	0.015	0.020	0.029	0.037	0.045	0.054	0.071	0.077	0.087	0.097	0.106	0.116
0.60	0.017	0.023	0.033	0.042	0.051	0.061	0.079	0.086	0.097	0.108	0.118	0.129
0.65	0.019	0.026	0.037	0.047	0.058	0.069	0.086	0.094	0.107	0.118	0.130	0.143
0.70	0.021	0.029	0.041	0.052	0.064	0.076	0.094	0.102	0.117	0.130	0.143	0.156
0.75	0.024	0.032	0.045	0.058	0.070	0.084	0.101	0.111	0.126	0.141	0.155	0.170
0.80	0.026	0.035	0.050	0.063	0.077	0.092	0.109	0.119	0.136	0.152	0.168	0.184
0.85	0.028	0.038	0.054	0.069	0.084	0.100	0.117	0.128	0.146	0.163	0.180	0.198
0.90	0.031	0.041	0.058	0.074	0.090	0.108	0.124	0.137	0.156	0.175	0.193	0.212
0.95	0.033	0.044	0.062	0.080	0.097	0.116	0.132	0.145	0.166	0.186	0.205	0.226
1.00	0.035	0.047	0.067	0.085	0.104	0.124	0.140	0.154	0.177	0.197	0.218	0.240
1.05	0.038	0.051	0.071	0.091	0.111	0.132	0.147	0.163	0.187	0.209	0.231	0.254



○KAMU1010-N1能力グラフ

ver. 20100101

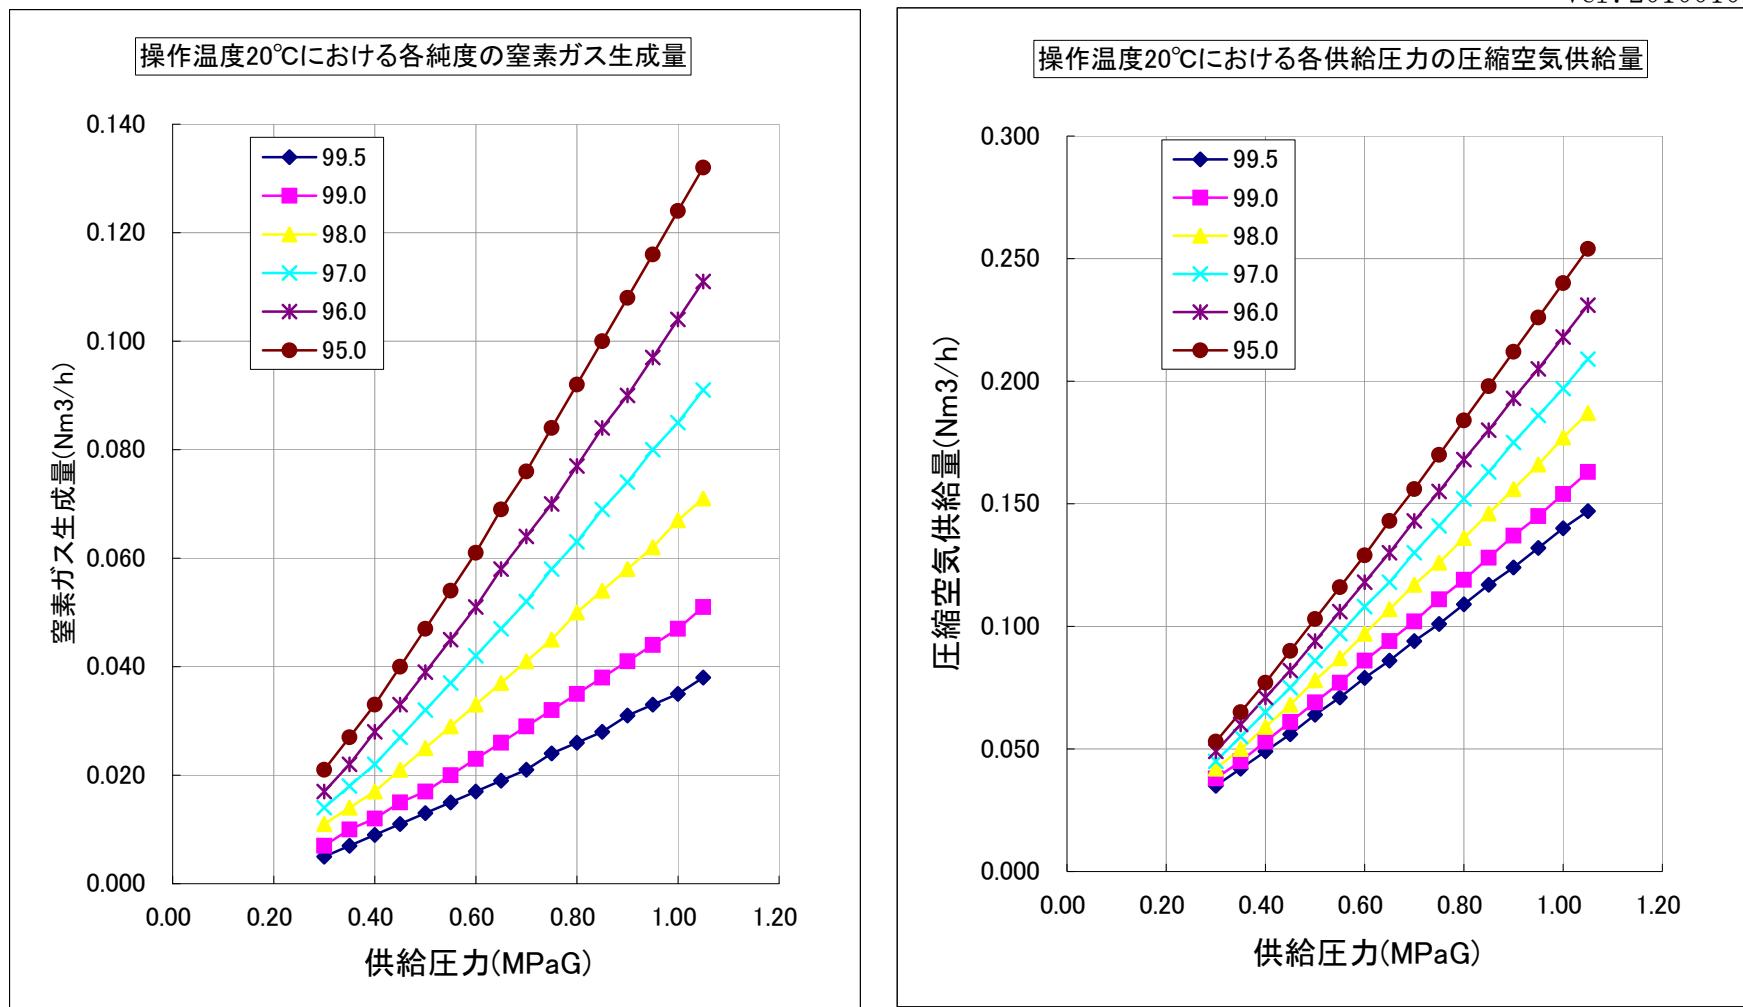

関西オートメ機器株式会社

○KAMU1010-N1能力表

○操作温度20°C基本性能データ(窒素生成量)


ver. 20100101

処理圧力 MPaG	窒素ガス生成量(NmL/min)						圧縮空気供給量(NmL/min)					
	窒素ガス純度(%)						窒素ガス純度(%)					
99.5	99.0	98.0	97.0	96.0	95.0	99.5	99.0	98.0	97.0	96.0	95.0	
0.30	83	117	183	233	283	350	583	633	700	750	817	883
0.35	117	167	233	300	367	450	700	750	833	917	1000	1083
0.40	150	200	283	367	467	550	817	883	983	1083	1183	1283
0.45	183	250	350	450	550	667	933	1017	1133	1250	1367	1500
0.50	217	283	417	533	650	783	1067	1150	1300	1433	1567	1717
0.55	250	333	483	617	750	900	1183	1283	1450	1617	1767	1933
0.60	283	383	550	700	850	1017	1317	1433	1617	1800	1967	2150
0.65	317	433	617	783	967	1150	1433	1567	1783	1967	2167	2383
0.70	350	483	683	867	1067	1267	1567	1700	1950	2167	2383	2600
0.75	400	533	750	967	1167	1400	1683	1850	2100	2350	2583	2833
0.80	433	583	833	1050	1283	1533	1817	1983	2267	2533	2800	3067
0.85	467	633	900	1150	1400	1667	1950	2133	2433	2717	3000	3300
0.90	517	683	967	1233	1500	1800	2067	2283	2600	2917	3217	3533
0.95	550	733	1033	1333	1617	1933	2200	2417	2767	3100	3417	3767
1.00	583	783	1117	1417	1733	2067	2333	2567	2950	3283	3633	4000
1.05	633	850	1183	1517	1850	2200	2450	2717	3117	3483	3850	4233



○KAMU1010-N1能力グラフ

ver. 20100101

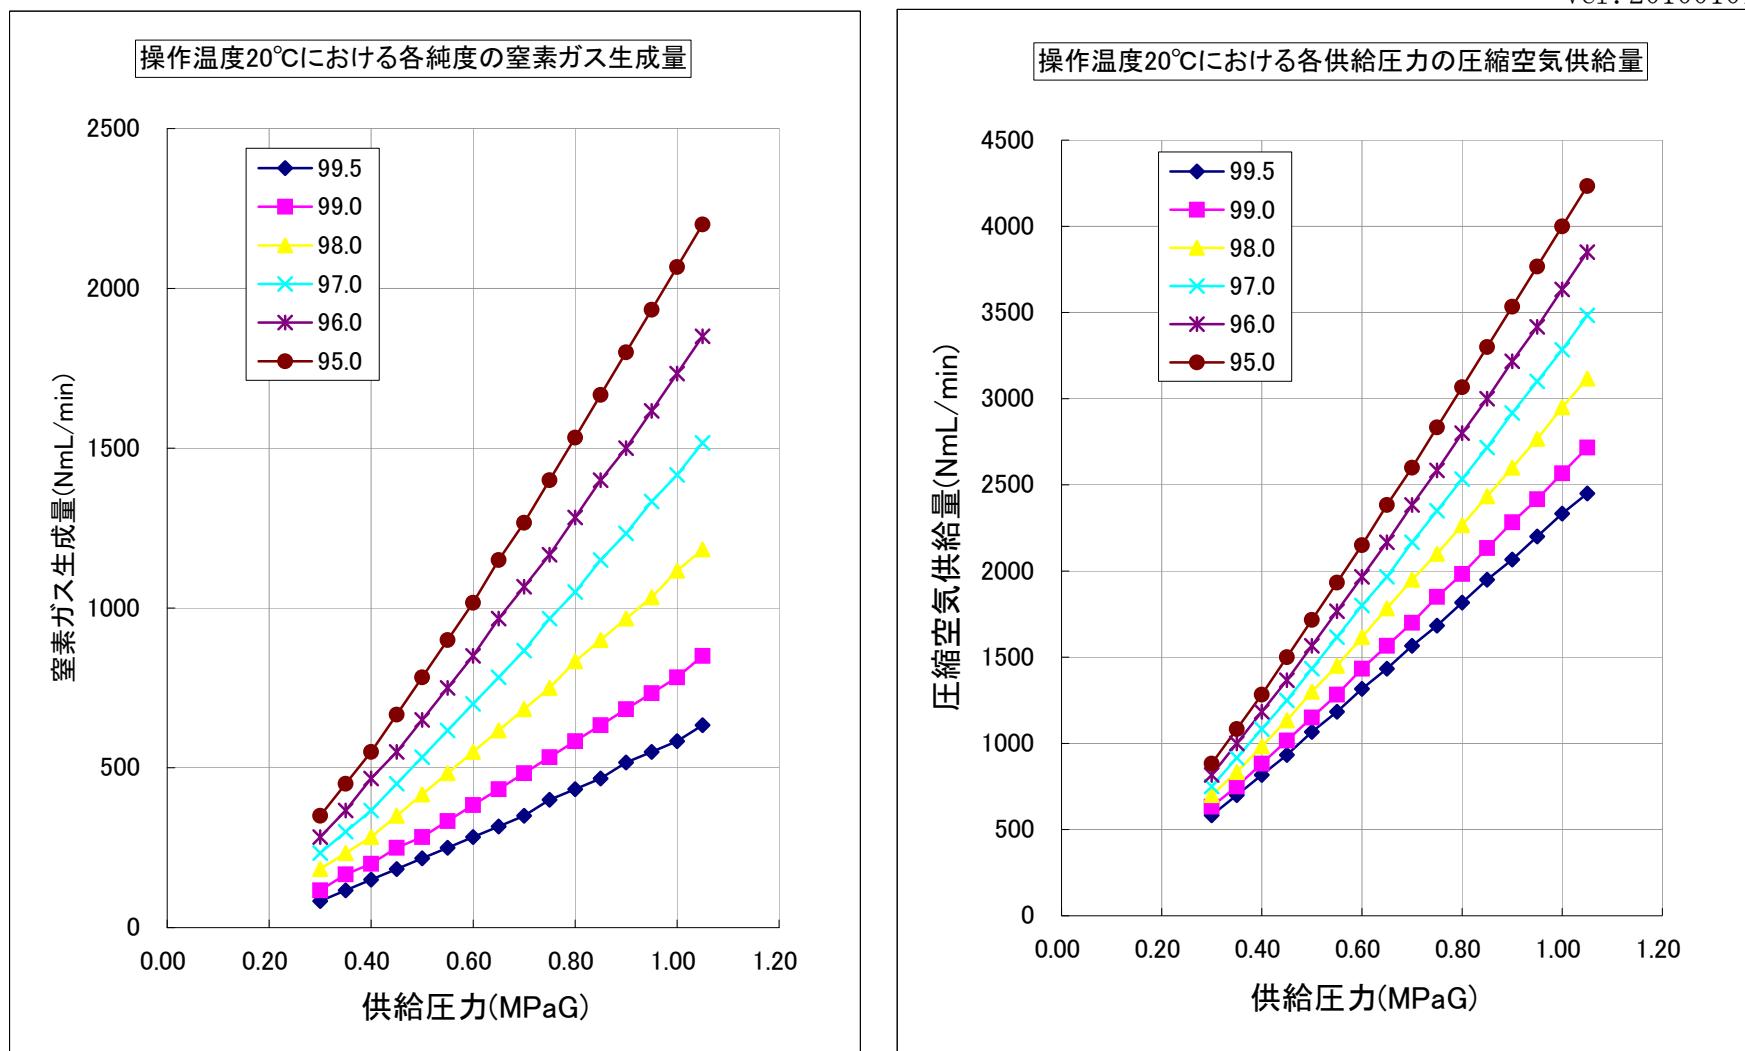

関西オートメ機器株式会社