

○KAMU4050-P1能力表



○操作温度24℃基本性能データ(窒素生成量)

ver. 20100101

窒素ガス生成量(NM3/hr)							圧縮空気供給量(NM3/hr)					
処理圧力	窒素ガス純度(%)						窒素ガス純度(%)					
MPaG	99.5	99.0	98.0	97.0	96.0	95.0	99.5	99.0	98.0	97.0	96.0	95.0
0.41	0.84	1.13	1.60	2.03	2.48	2.95	4.37	4.71	5.25	5.75	6.24	6.76
0.48	1.07	1.43	2.02	2.56	3.12	3.72	5.21	5.64	6.32	6.94	7.56	8.21
0.55	1.30	1.74	2.45	3.12	3.79	4.51	6.06	6.58	7.40	8.15	8.91	9.70
0.62	1.54	2.06	2.90	3.69	4.48	5.33	6.92	7.53	8.50	9.39	10.30	11.20
0.69	1.79	2.39	3.36	4.27	5.19	6.17	7.78	8.49	9.62	10.60	11.70	12.70
0.76	2.04	2.73	3.83	4.86	5.91	7.02	8.66	9.46	10.70	11.90	13.10	14.30
0.83	2.30	3.07	4.31	5.46	6.63	7.88	9.53	10.40	11.90	13.20	14.50	15.90
0.90	2.56	3.41	4.79	6.07	7.37	8.75	10.40	11.40	13.00	14.50	15.90	17.40
0.97	2.82	3.76	5.28	6.68	8.11	9.63	11.30	12.40	14.20	15.80	17.30	19.00
1.03	3.08	4.11	5.77	7.30	8.86	10.50	12.20	13.40	15.30	17.00	18.80	20.60
1.10	3.35	4.46	6.26	7.92	9.61	11.40	13.10	14.40	16.50	18.30	20.20	22.20
1.17	3.62	4.82	6.76	8.55	10.40	12.30	14.00	15.40	17.60	19.60	21.70	23.80
1.24	3.89	5.18	7.25	9.18	11.10	13.20	14.80	16.40	18.80	21.00	23.10	25.40
1.31	4.16	5.54	7.76	9.81	11.90	14.10	15.70	17.40	19.90	22.30	24.60	27.00
1.38	4.43	5.90	8.26	10.40	12.70	15.00	16.60	18.40	21.10	23.60	26.10	28.60
1.45	4.70	6.26	8.76	11.10	13.40	15.90	17.50	19.40	22.30	24.90	27.50	30.30
1.52	4.97	6.62	9.27	11.70	14.20	16.80	18.40	20.40	23.40	26.20	29.00	31.90

○KAMU4050-P1能力グラフ

ver. 20100101

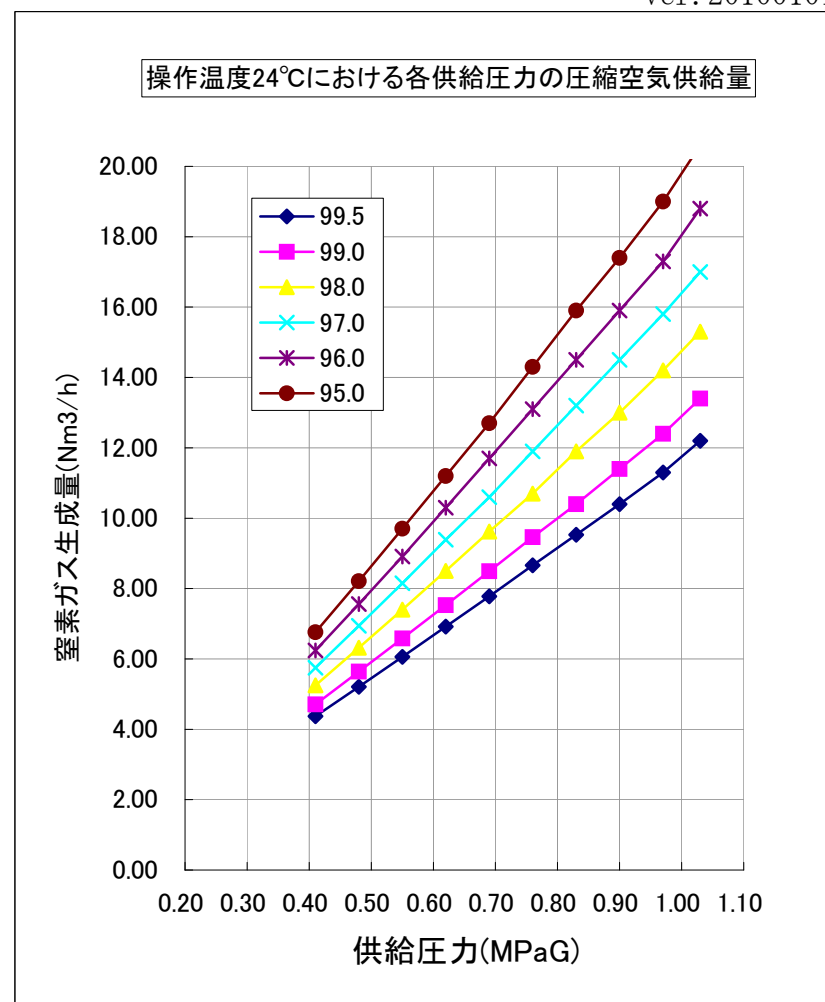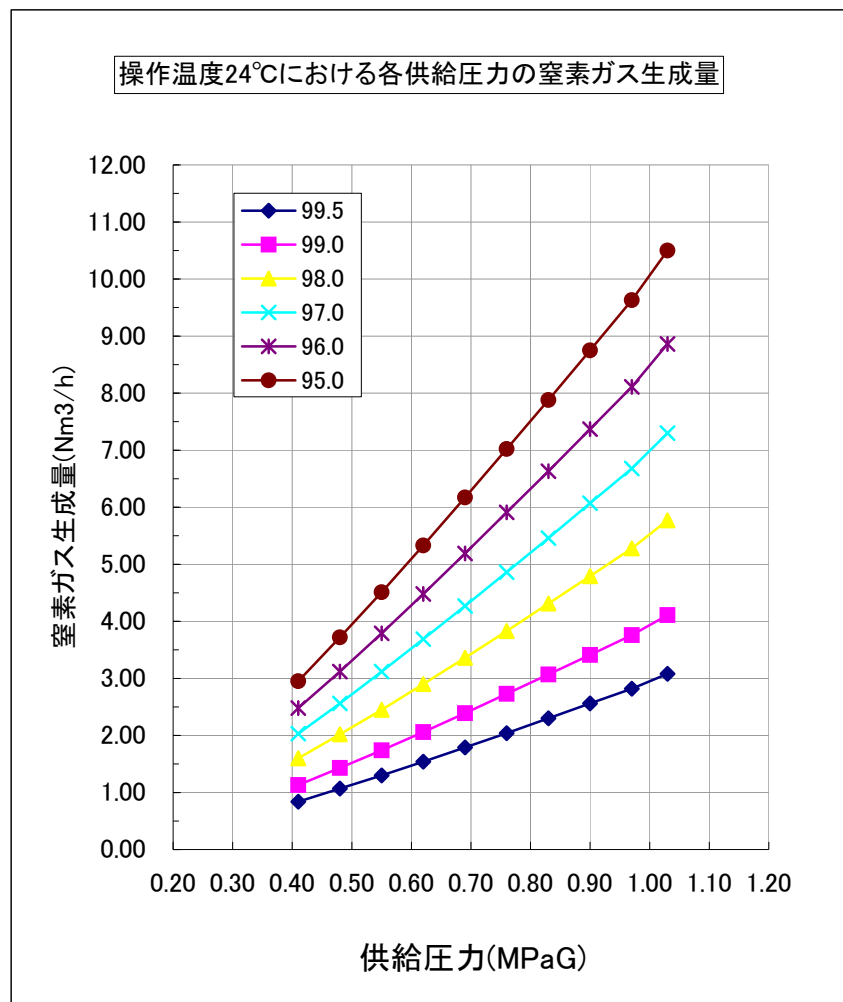

○KAMU4050-P1能力表

○操作温度46℃基本性能データ(窒素生成量)

ver. 20100101

窒素ガス生成量(NM3/hr)							圧縮空気供給量(NM3/hr)					
処理圧力 MPaG	窒素ガス純度(%)						窒素ガス純度(%)					
	99.5	99.0	98.0	97.0	96.0	95.0	99.5	99.0	98.0	97.0	96.0	95.0
0.41	1.18	1.64	2.40	3.10	3.82	4.59	8.08	8.61	9.50	10.30	11.10	11.90
0.48	1.50	2.08	3.02	3.90	4.81	5.77	9.59	10.30	11.30	12.30	13.30	14.40
0.55	1.83	2.52	3.67	4.73	5.82	6.98	11.10	11.90	13.20	14.40	15.60	16.90
0.62	2.16	2.99	4.33	5.59	6.87	8.23	12.60	13.60	15.10	16.50	18.00	19.40
0.69	2.51	3.46	5.01	6.45	7.93	9.50	14.20	15.30	17.10	18.70	20.30	22.00
0.76	2.86	3.94	5.69	7.34	9.01	10.80	15.70	17.00	19.00	20.80	22.70	24.60
0.83	3.21	4.42	6.39	8.23	10.10	12.10	17.30	18.70	20.90	23.00	25.10	27.30
0.90	3.57	4.91	7.09	9.13	11.20	13.40	18.80	20.40	22.90	25.20	27.50	29.90
0.97	3.93	5.40	7.80	10.00	12.30	14.70	20.40	22.10	24.90	27.40	29.90	32.50
1.03	4.29	5.90	8.52	11.00	13.40	16.10	22.00	23.80	26.80	29.60	32.30	35.20
1.10	4.66	6.40	9.23	11.90	14.60	17.40	23.50	25.50	28.80	31.80	34.70	37.90
1.17	5.03	6.90	10.00	12.80	15.70	18.70	25.10	27.30	30.80	34.00	37.20	40.50
1.24	5.40	7.41	10.70	13.70	16.80	20.10	26.70	29.00	32.70	36.20	39.60	43.20
1.31	5.77	7.91	11.40	14.60	17.90	21.40	28.20	30.70	34.70	38.40	42.00	45.90
1.38	6.14	8.42	12.10	15.60	19.10	22.80	29.80	32.50	36.70	40.60	44.50	48.60
1.45	6.51	8.93	12.90	16.50	20.20	24.20	31.40	34.20	38.70	42.80	46.90	51.20
1.52	6.88	9.44	13.60	17.40	21.40	25.50	32.90	35.90	40.70	45.00	49.40	53.90

○KAMU4050-P1能力表

ver. 20100101

